

LISEGA plug-in for BricsCAD



Plugin version 12.1.0.8

Table of content

Important note.....	3
Installation	3
UI changes.....	3
General Plugin information.....	6
Insertion of LISEGA supports	6
Variant 1:.....	6
Configurations available.....	13
Variant 2: Import of L3D files.....	15
Commands available	16
LSET	16
LIPART3D	17
LIPART2D (new command!)	17
LICAD.....	18
LICAD1.....	18
LICAD2.....	18
LICAD3.....	18
LICAD4.....	18
LICAD5.....	18
LICADmod	18
L3DIMP or -L3DIMP	18

Important note

Only BricsCAD versions 24.1.05 (and above) and 25 are supported, because this plug in version uses the new hidden line removal API available since BricsCAD 24.1.05!

Installation

Start the installation program “LISEGA plugin for BricsCAD <version number>.exe” as administrator.

The installation program will always install the plugin in the folder "C:\Program Files\LISEGA\BricsCAD plugin".


BricsCAD is now automatically configured to load the plugin and the partial cui file.

Therefore, no additional steps are needed.

After running the plugin installation program, the plugin is ready to use!


UI changes

There is a ribbon control called “LISEGA Tools” installed:

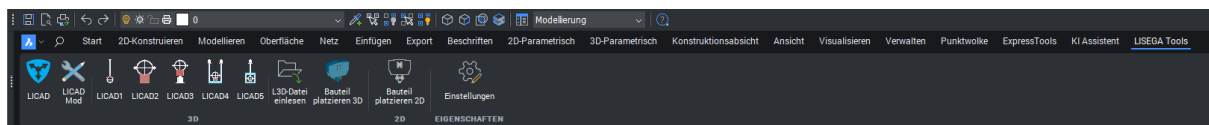


It contains all available commands of the plugin.


The UI change can also be applied manually, if it does not automatically occur (here the “LISEGA Tools” ribbon is missing)

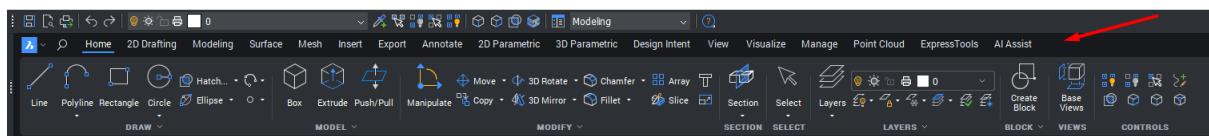


by running the command “customize”:

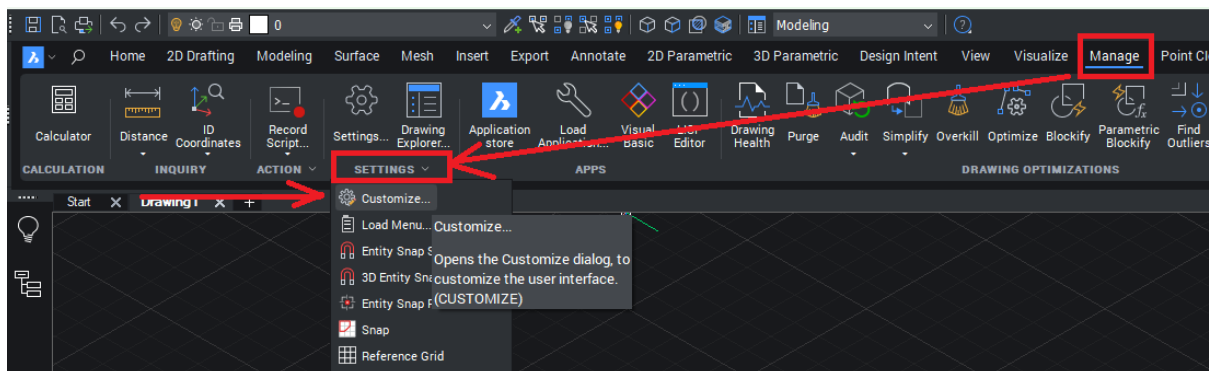

Select the “Load partial CUI file ...” from the file menu in the displayed dialog:

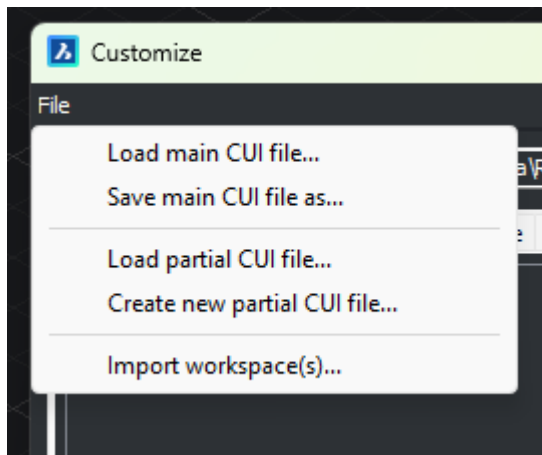


In the “Choose a Customization File” dialog goto the folder
“C:\Program Files\LISEGA\BricsCAD plugin\UI customization”
and select “lisega_plugin_en”:

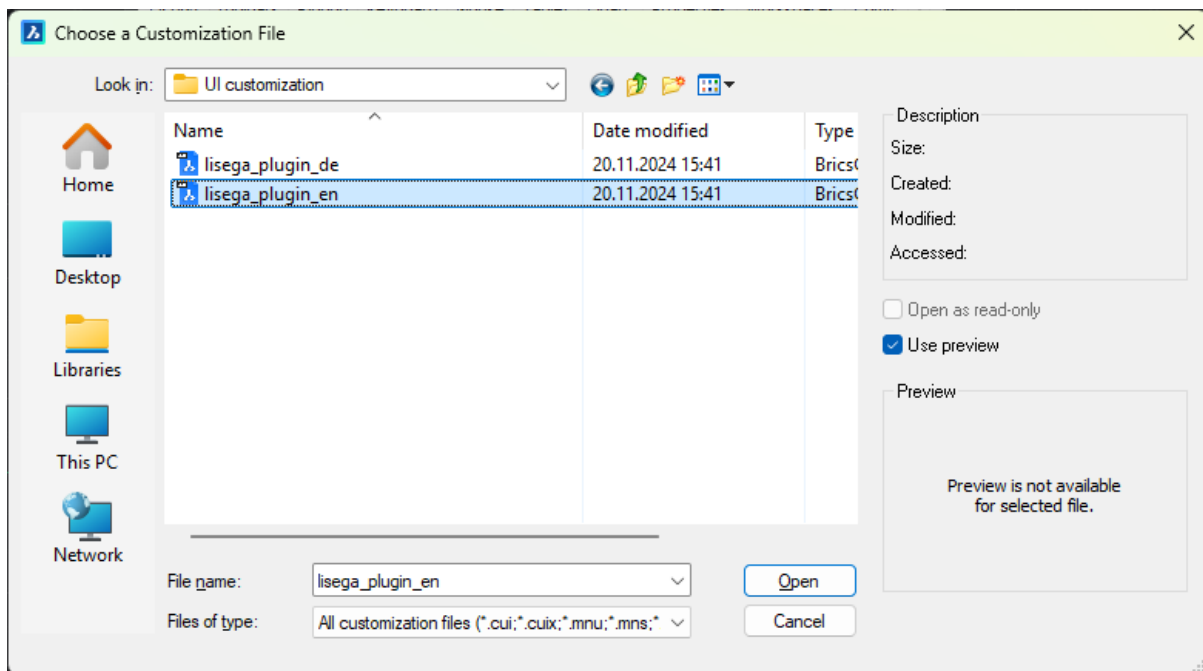


Now click on the button “Open”.

In the Customize dialog the additional tree node “LISEGA_PLUGIN_EN” is displayed:

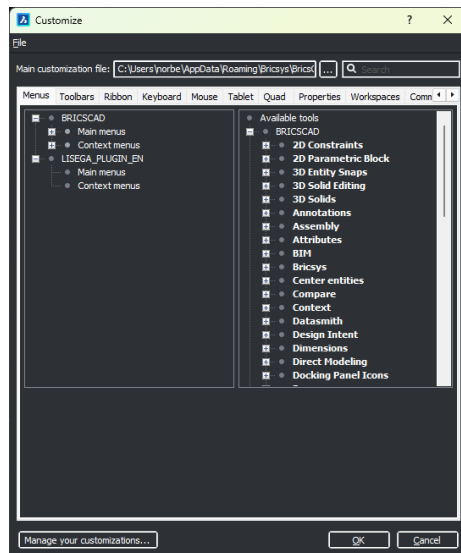

Click the „Ok“ button to close the dialog and the UI change is applied.

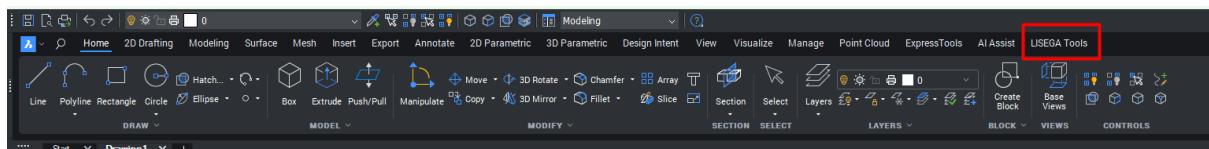

General Plugin information

The plugin is identical to the AutoCAD plugin. That means that the same commands are available in the BricsCAD plugin as in the AutoCAD plugin.

Insertion of LISEGA supports

Two variants are available for placing LISEGA components.

The first possibility is the interactive process by which LICAD¹ program is directly accessed during the creation of the support in the 3D model.

The second possibility is the import² of L3D files created with LICAD. The information contained in the L3D file is then transferred to corresponding 3D objects.


Variant 1:

Example of the command „LICAD“


An empty drawing file is used here to draw attention to the essential points. A support is to be placed between the two 3D crosses displayed here.

1 For this, the LICAD program must be installed on the computer

2 The installation of LICAD is not necessary for this.

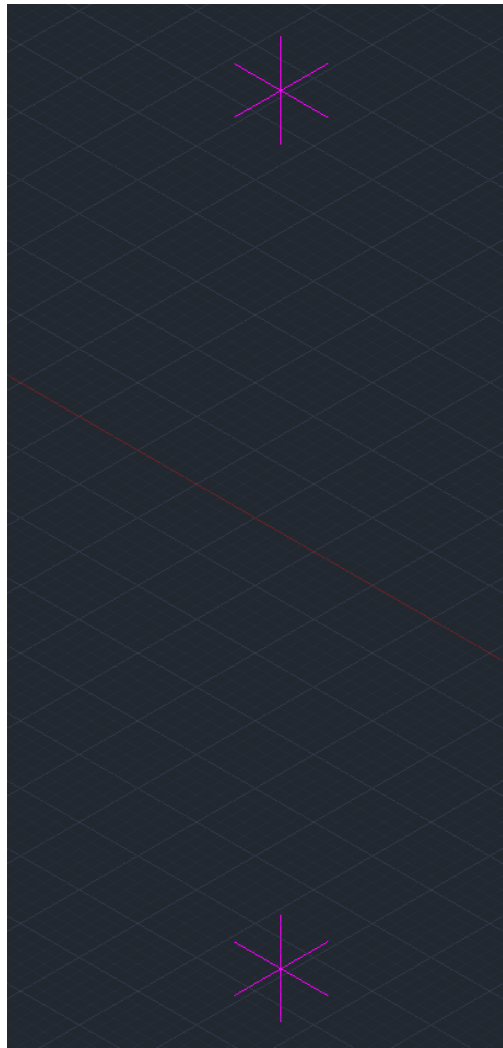


Configuration 1 is used. This can be carried out by the command „LICAD“ and subsequent request for the configuration number or by the command „LICAD1“, which already has the number in the name.




As the “LICAD1” command was activated, the request for the configuration number is skipped over.


The question is then put as to whether the support is to be free or placed on the piping.

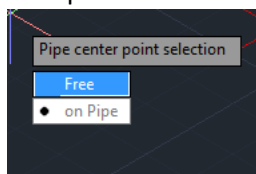


As an empty drawing was used in the example, the „on pipe“ option does not function, so the „free“ option was chosen. During the pipe center point input, the positioning of the clamp in the direction „X“ or „Y“ axis can be decided on. The specification is the „X“ direction.

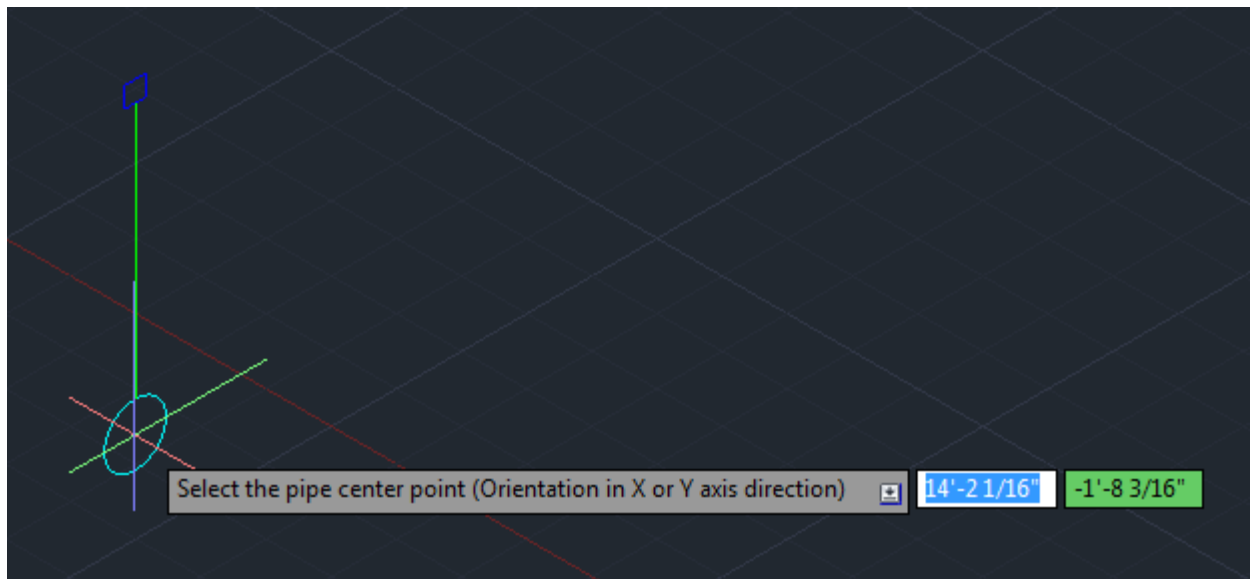

After the entry of „Y“ instead of a point the clamp is correspondingly displayed rotated by 90° (see the two following illustrations).

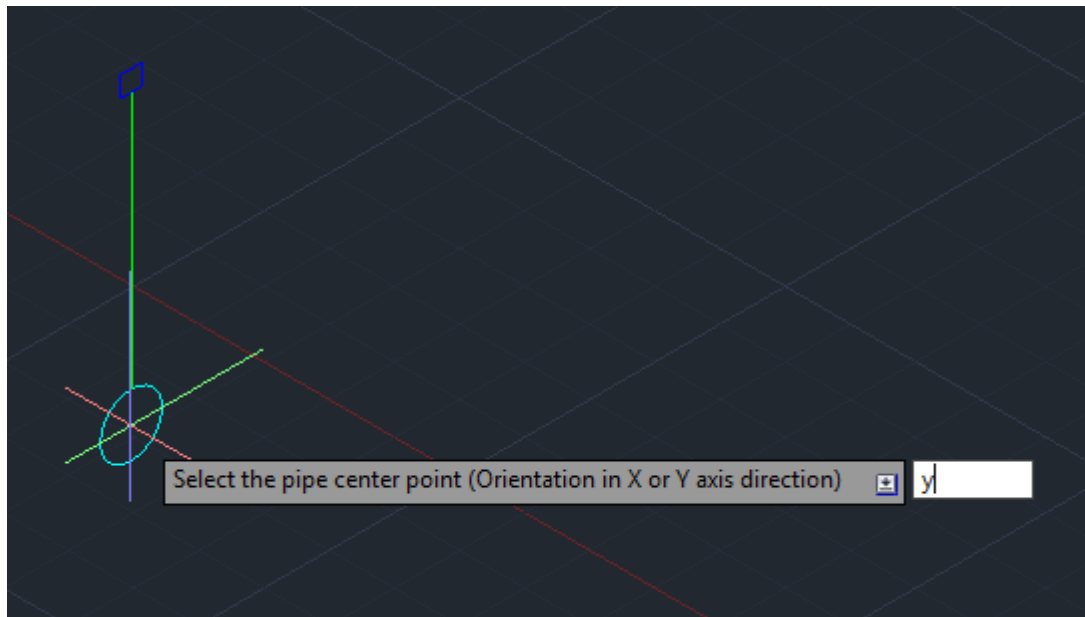


After confirmation of the entry the clamp rotates in the „Y“ axis direction.

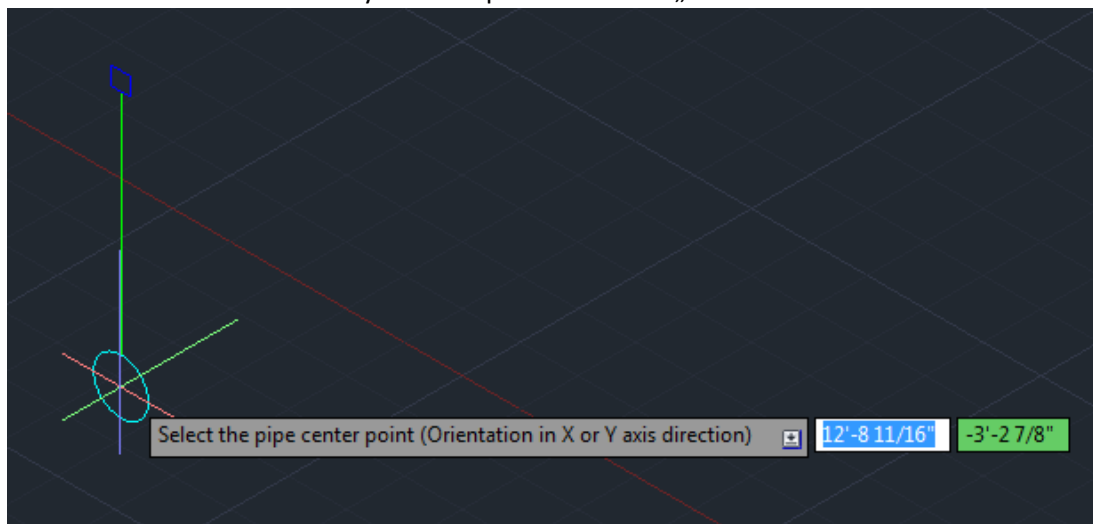


By entering the letter „X“, and following confirmation, the positioning of the clamps is again carried out in the direction of the X axis. Now the pipe center point is determined here on the intercept of


the lines of the lower star.

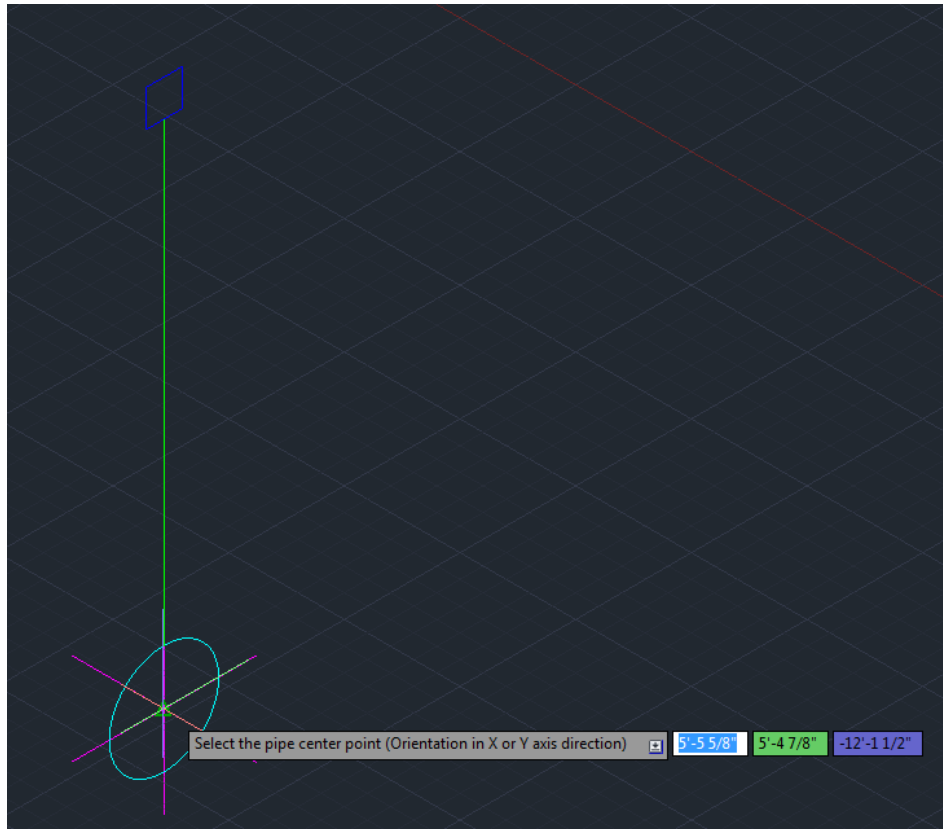


After that the upper attachment point of the support to the intercept of the lines of the upper star is determined.

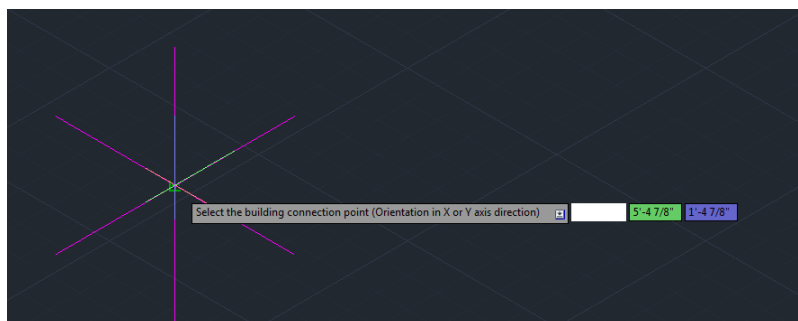

After confirmation of the structural attachment point the LICAD program is automatically started. There the relevant data available (the configuration selected in LICAD is No. 13, the elevation numbers are entered) are already in the input fields. As the free mode was selected, no pipe data are on hand. In the „on pipe“ mode the data for the diameter, temperature and insulation would have been taken over.

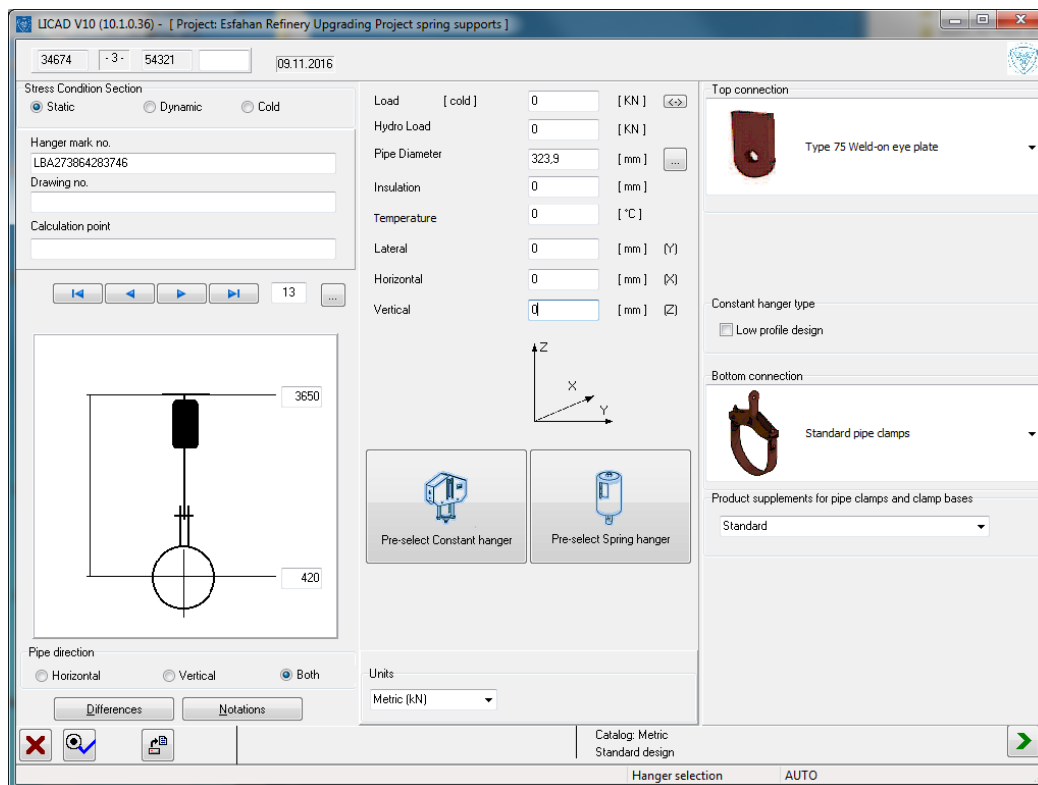


The missing data needed by LICAD for the design can now be simply supplemented.

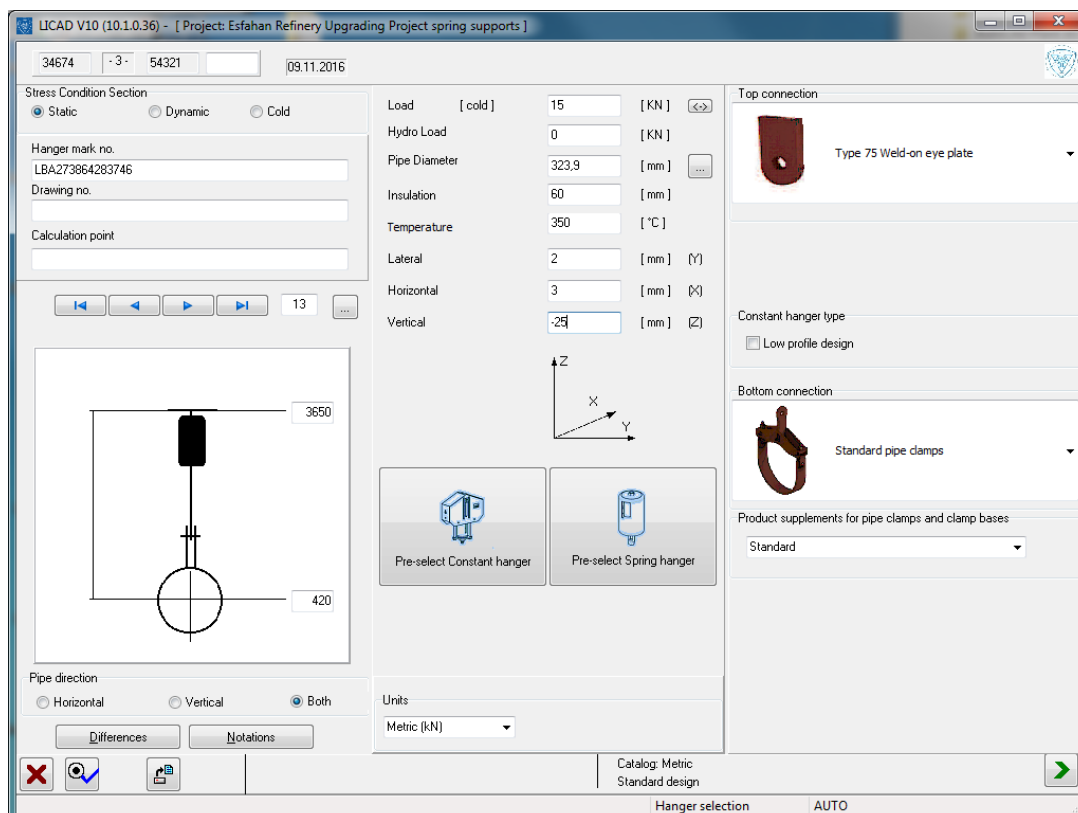

On completion of all inputs, only the button at the bottom right with the green arrow now has to be pressed. LICAD then assembles the components required and supplies the information to the plug-in.

The plug-in reads this information and generates from it the whole support out of the individual components composed from 3D bodies.

The result of this example looks as follows:

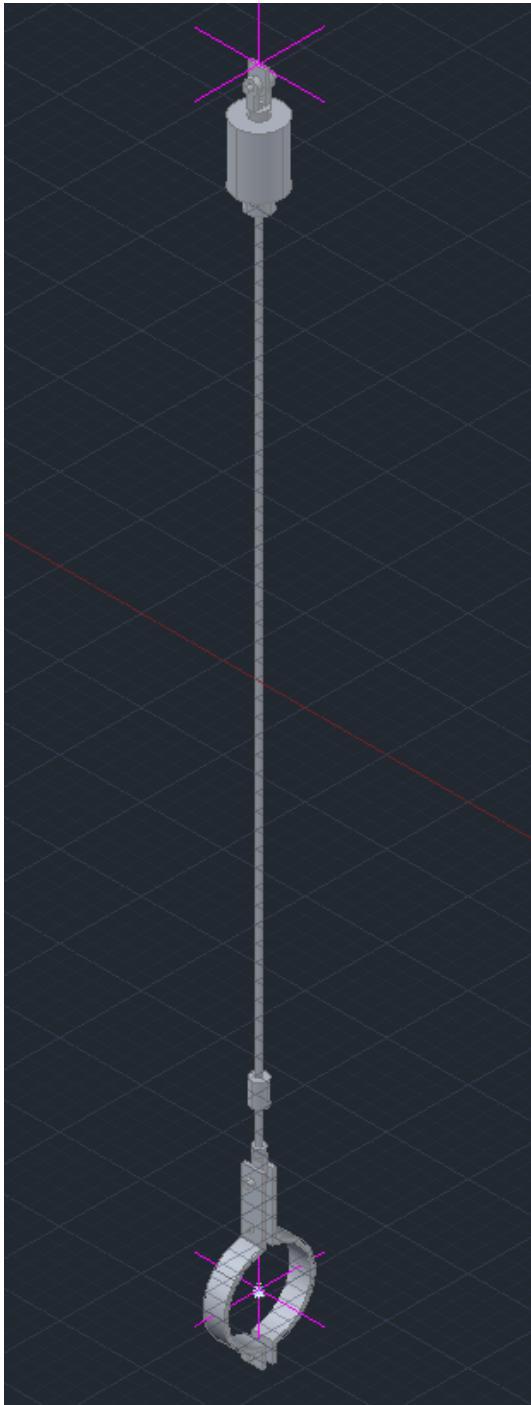

Configurations available

For the commands LICAD, LICAD1, LICAD2, LICAD3, LICAD4 or LICAD5 the following configurations are currently available.


Configuration 1:

(Simple suspension for horizontal pipes)




Configuration 2:


(Clamp base / pipe shoe for horizontal pipes)

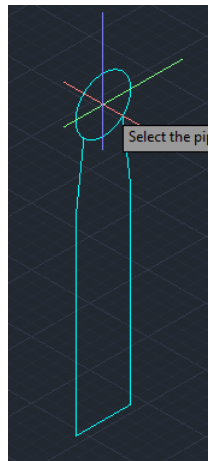

Configuration 3: (Clamp base with spring support for horizontal pipes)

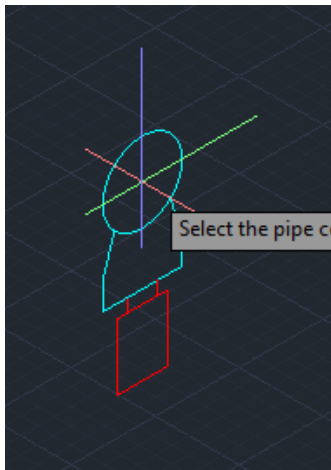


Configuration 4 (for horizontal pipes):

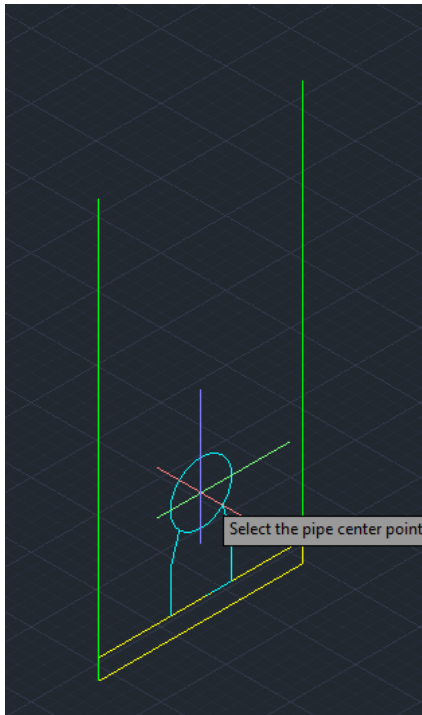


Configuration 4 (for vertical pipes):



Configuration 5 (for horizontal pipes):

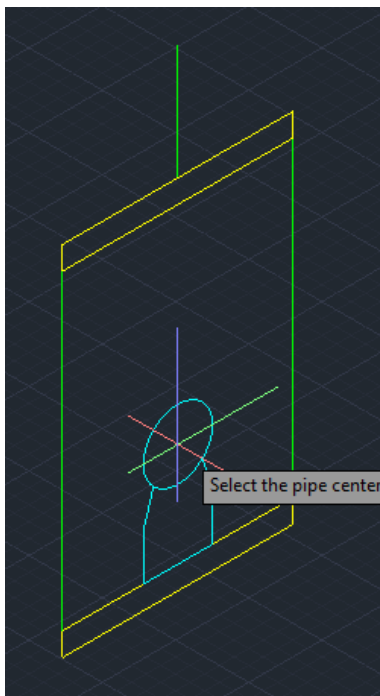


Configuration 5 (for vertical pipes):

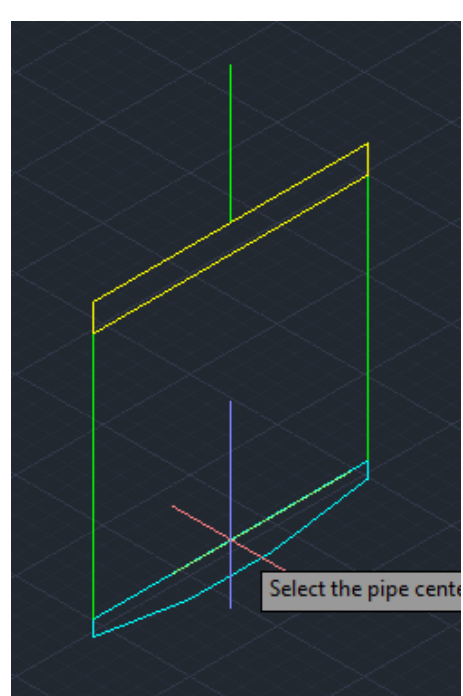


Variant 2: Import of L3D files

Command input or Ribbon button

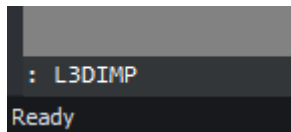


1. An „open file“ dialog appears, in which files of the type „LISEGA support information (*.L3D)“ can be selected.

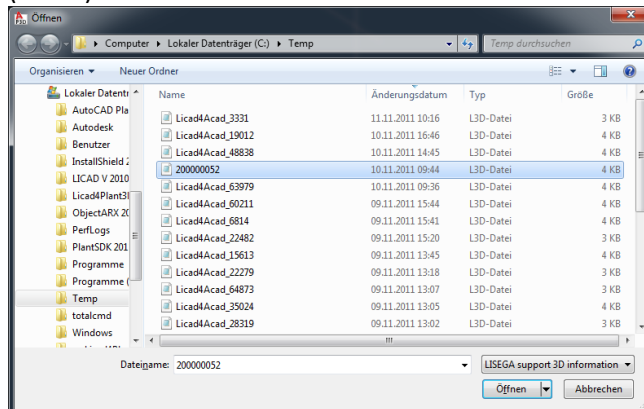

Select a file and press the „open“ button.


2. The plug-in reads the information from the L3D file and creates from it the 3D model of the support.

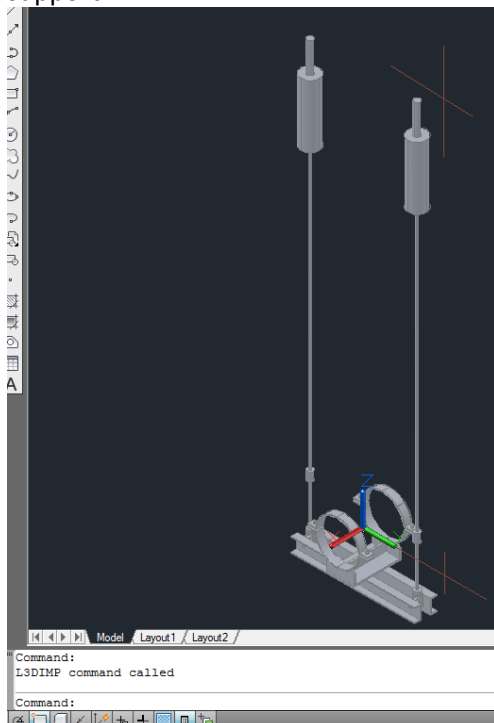

Commands available


LISET

The settings for the plug-in can hereby be displayed and if necessary altered.

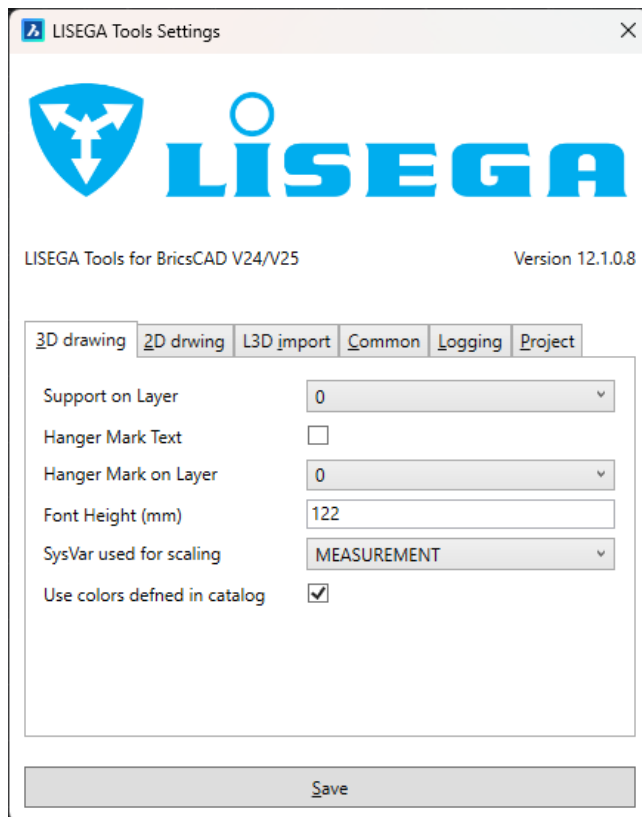


LIPART3D

With the aid of this command individual components from the LISEGA catalog can be inserted into the 3D model.

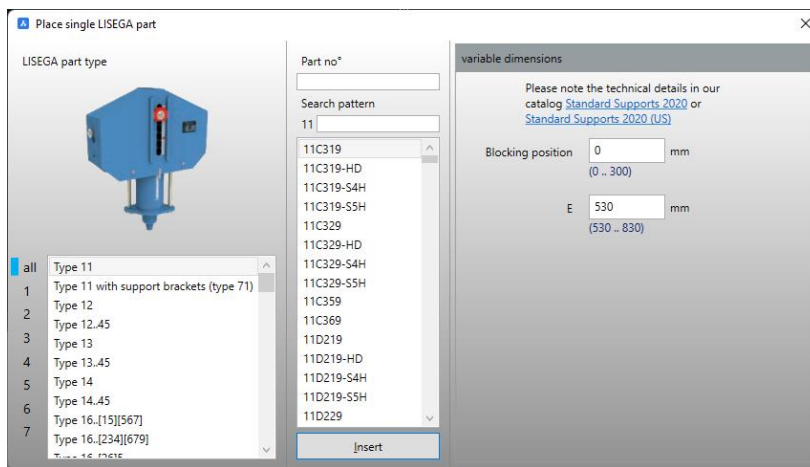

LIPART2D (new command!)

This command creates 2D drawings of the selected part.

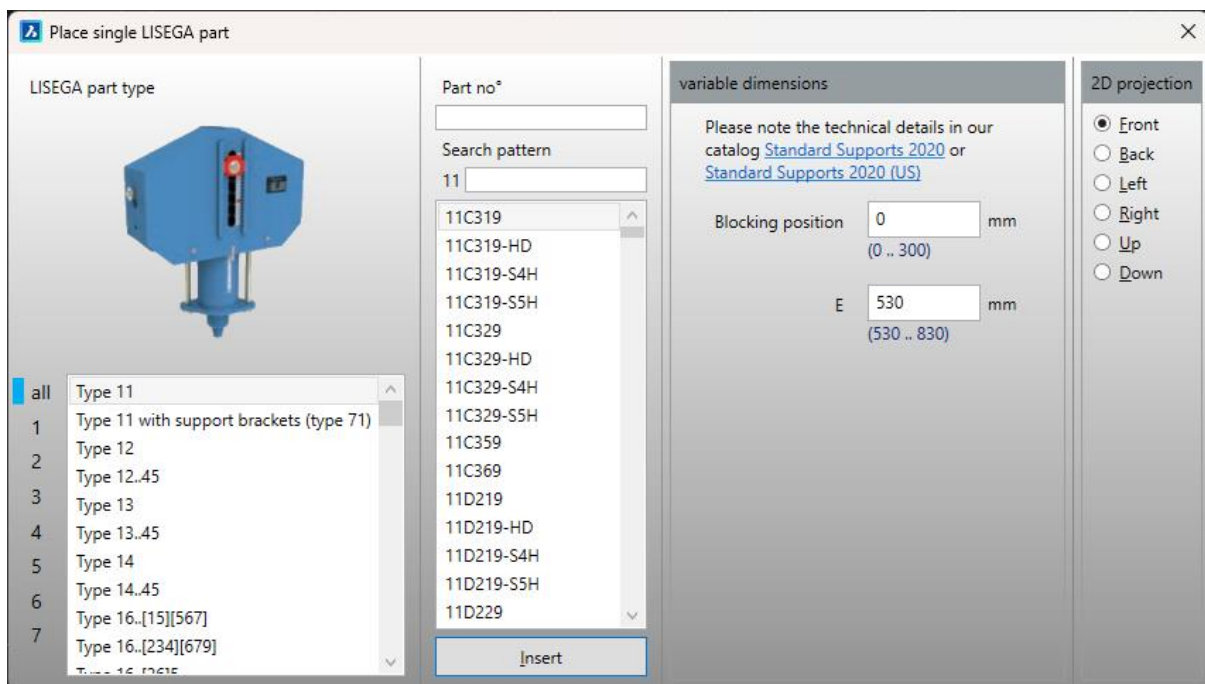

The kind (front, side, ...) of 2D drawing can be specified as well.

LICAD

LICAD1

LICAD2

LICAD3

LICAD4

LICAD5

LICADmod

These commands always start the LICAD program after requesting the necessary information in AutoCAD/Plant 3D. A distinction is only made with regard to the preselection of the configuration.

L3DIMP or -L3DIMP

These two commands import LISEGA supports available in the shape of L3D files.

The command „...L3DIMP“ opens an „open file“ dialog. The „-...L3DIMP“ command is the command line variant of the command „...L3DIMP“ and queries the file name in the command line.

It is necessary that a support is created, stored and exported beforehand as an L3D file with the LICAD program. (See attachment - LICAD creation of a support, export of a stored support as L3D file)